
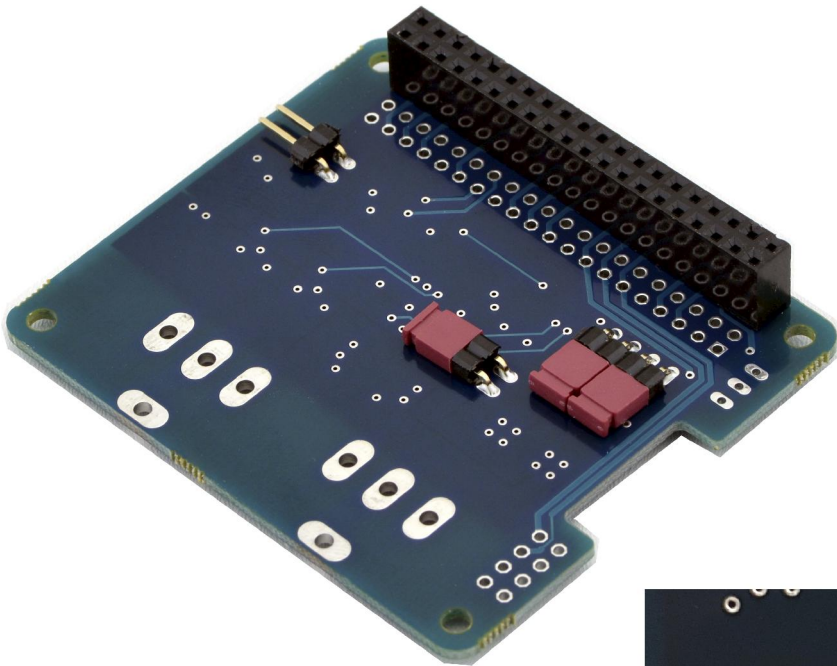


AroioDAC Connections

IR-Receiver
(GPIO25)

- 1 = Out R
- 2 = Ground
- 3 = Out L
- 4 = Ground
- 5 = GPIO17
- 6 = GPIO25
- 7 = GPIO27
- 8 = GPIO22

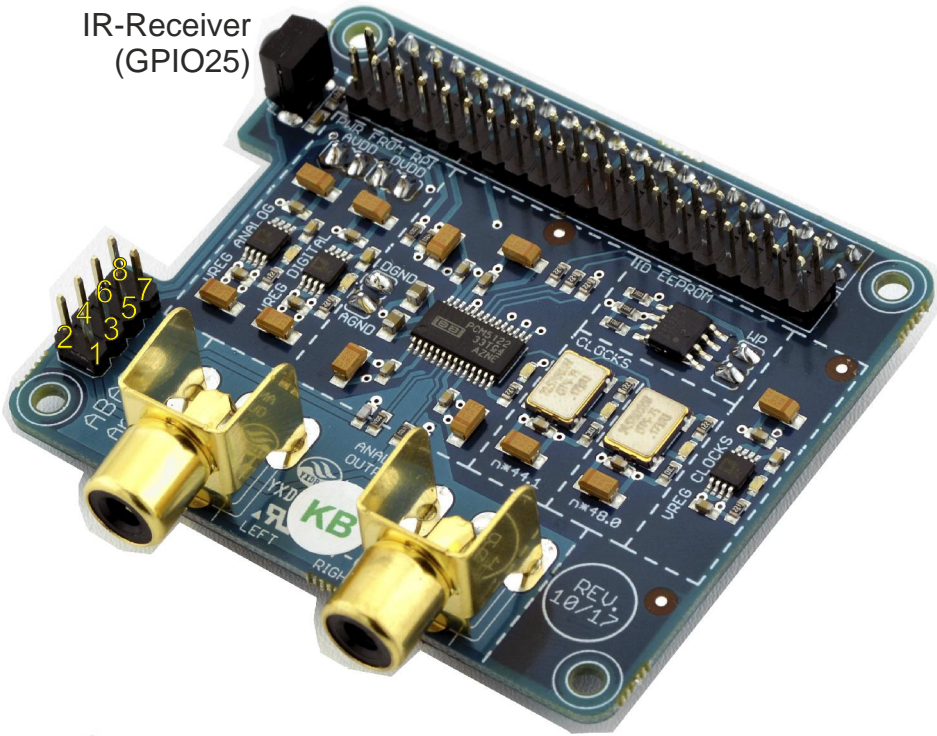

AGND (connected to RPi)

For an independent power supply remove jumpers and power the two center pins with 5V.

